



FIRE HYDRANT

Kolling manufactures Pedestal Hydrant consist of the High and Low Pressure Type. Kolling Hydrants are suitable for use in refineries, factories and public housing.

GENERAL SPECIFICATIONS (High Pressure)

Body Material : Carbon Steel
Outlet : HV007
Test Pressure : 30 bar (435 psi)
Working Pressure : 20 bar (290 psi)
Seat Test Pressure : 22 bar (319 psi)
Finishing : RED


GENERAL SPECIFICATIONS (Low Pressure)

Body Material : Cast Iron to BS 1452
Outlet : HV005
Test Pressure : 22.5 bar (326 psi)
Working Pressure : 15 bar (217 psi)
Seat Test Pressure : 16.5 bar (239 psi)
Finishing : RED

*Different Inlet and Outlet Connections are available upon customer requirement

*Specifications are subject to change depending on market and customer requirement.

STEEL FIRE HYDRANT

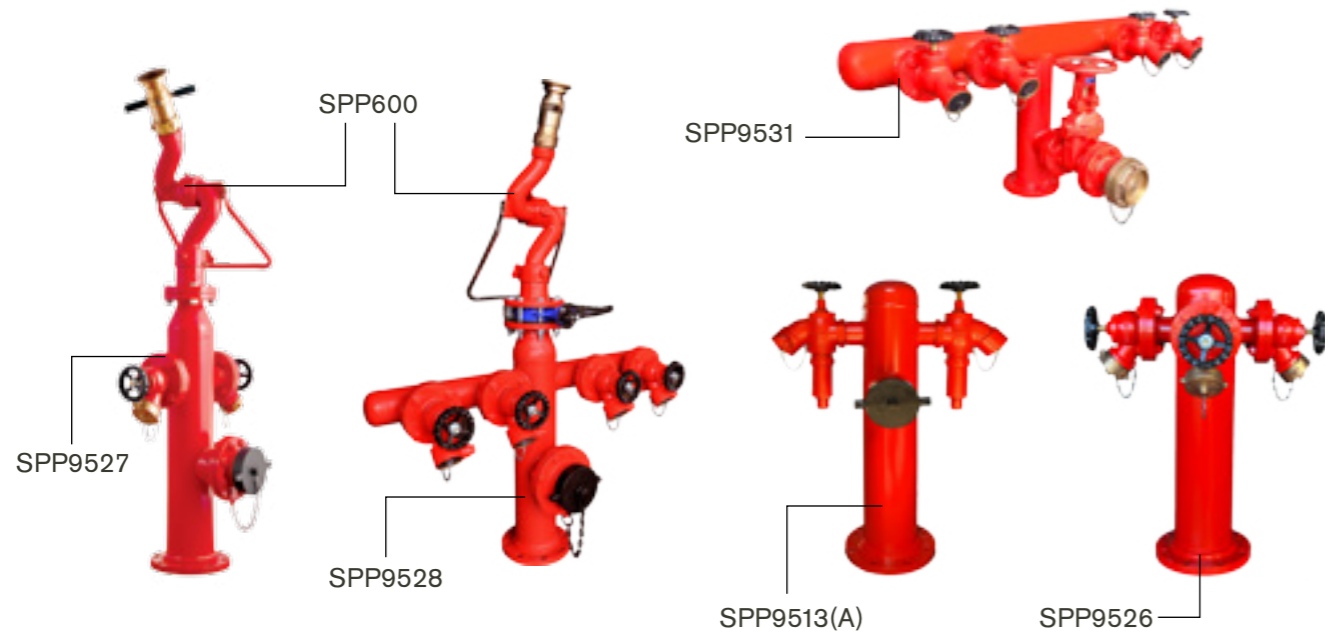


STEEL FIRE HYDRANT

Model	Description	Outlet	Inlet	Body	Type
SPP9513	2 Way Steel Hydrant	2 X Screw or Flange Landing Valve	4" or 6" ANSI B16.5 #150 FF Flange	Carbon Steel	Low Pressure
SPP9526/ SPP9529	3 Way Steel Hydrant	3 X Screw or Flange Landing Valve	4" or 6" ANSI B16.5 #150 FF Flange	Carbon Steel	Low Pressure
SPP9527	3 Way Steel Hydrant With Monitor & Pumper Connection	2 X Screw or Flange Landing Valve With Female BS336 or Male NHT Outlet 1 X Male or Female Pumper Connection 1 X Monitor Mounting Flange	4" or 6" ANSI B16.5 #150 FF Flange	Carbon Steel	Low Pressure
SPP9527(A)		2 X Screw or Flange Self Regulating Landing Valve 1 X Male or Female Pumper Connection 1 X Monitor Mounting Flange	4" or 6" ANSI B16.5 #150 FF Flange	Carbon Steel	High Pressure
SPP9528	4 Way Steel Hydrant With Monitor & Pumper Connection	4 X Screw or Flange Landing Valve 1 X Male or Female Pumper Connection 1 X Monitor Mounting Flange	4" or 6" ANSI B16.5 #150 FF Flange	Carbon Steel	Low Pressure
SPP9528(A)		4 X Screw or Flange Self Regulating Landing Valve 1 X Male or Female Pumper Connection 1 X Monitor Mounting Flange	4" or 6" ANSI B16.5 #150 FF Flange	Carbon Steel	High Pressure
SPP9531	4 Way Steel Hydrant With Pumper Connection	4 X Screw or Flange Landing Valve 1 X Male or Female Pumper Connection	4" or 6" ANSI B16.5 #150 FF Flange	Carbon Steel	Low Pressure
SPP9531(A)		4 X Screw or Flange Self Regulating Landing Valve 1 X Male or Female Pumper Connection	4" or 6" ANSI B16.5 #150 FF Flange	Carbon Steel	High Pressure

Due to our continuous research and development for product improvement specifications subject to change without prior notice

PILLAR FIRE HYDRANT

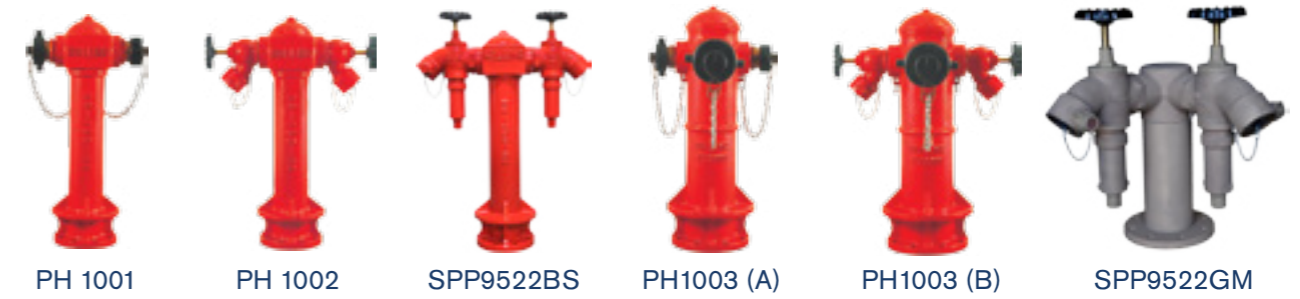

2 WAY FIRE HYDRANT

*Available in Yellow

Model	Description	Outlet	Inlet	Body	Type
PH1001	Two Way Pillar Hydrant	2 X 2 1/2" Male Thread With Cast Iron Cap	4" PN16 to BS4504	Cast Iron	Low Pressure
PH1002	Two Way Pillar Hydrant With Oblique Landing Valve	2 X 2 1/2" Oblique Landing Valve With Female BS336 Outlet	4" PN16 to BS4504	Cast Iron	Low Pressure
SPP9522NH	Two Way Pillar Hydrant With Self Regulating Valve	2 X 2 1/2" Self Regulating Valve With Male NHT Outlet	4" ANSI #150 FF	Cast Iron	High Pressure
SPP9522BS	Two Way Pillar Hydrant With Self Regulating Valve	2 X 2 1/2" Self Regulating Valve With Female BS336 Outlet	4" PN16 to BS4504	Cast Iron	High Pressure
SPP9522GM	Two Way Hydrant With Self Regulating Valve	2 X 2 1/2" Self Regulating Valve With Female BS336 Outlet	4" PN16 to BS4504	Gun-metal	High Pressure

3 WAY FIRE HYDRANT

Model	Description	Outlet	Inlet	Body	Type
PH1003(A)	Three Way Pillar Hydrant	2 X 2 1/2" Male Thread With Cast Iron Cap 1 X 4" Female Round Thread to BS336 With Cast Iron Cap	6" PN16 to BS4504	Cast Iron	Low Pressure
PH1003(B)	Three Way Pillar Hydrant With Oblique Landing Valve	2 X 2 1/2" Oblique Landing Valve With Female BS336 Outlet 1 X 4" Female Round Thread to BS336 With Cast Iron Cap	6" PN16 to BS4504	Cast Iron	Low Pressure

UNDERGROUND HYDRANT

GENERAL SPECIFICATIONS

General Specification (Low Pressure)
 Body : Cast Iron to BS1452
 Outlet : Copper Alloy to BS1400 Round/V-thread
 Inlet : 3" Flange to PN16
 Test Pressure : 20 bar (300 psi)
 Model : PH1004
 Colour : Black or Blue



PH1004

DUCK FOOT BEND

GENERAL SPECIFICATIONS

Body : Cast Iron to BS1452
 Inlet & Outlet : 4" Flange to PN16
 Model : PH1005



PH1005